

Leading edge
Reverse cycle
ducted air conditioning



“Seeley International never stops striving to innovate and build the world’s most energy efficient heaters and air conditioners.

It is this commitment to excellence that’s at the heart of everything we do.”

Frank Seeley AM FAICD
Founder and Executive Chairman



The award winning company

Seeley International consistently wins awards each year for new product design, innovation and the environment.

Recent awards include:



ABAA/COO
**NEW PRODUCT
INNOVATION
WINNER 2017**



sydney
design
awards



melbourne
design
awards



The natural choice for **comfort in all conditions**



DUCTED REVERSE CYCLE SYSTEMS

The ideal solution for whole of home or office heating and cooling. The air is circulated via ductwork and inverter technology ensures uninterrupted comfort and valuable energy savings.

Ducted reverse cycle systems consist of two parts; an indoor unit (placed within the roof space) and an outdoor unit.

The Braemar difference



COST EFFECTIVE

MEPS (Minimum Energy Performance Standards) compliant

DRED (Demand Response Enabling Device) feature



AUSTRALIAN OWNED

Seeley International, Australia's leading cooling and heating manufacturer



RANGE

Braemar offers a comprehensive range to suit everyone's needs



QUALITY

65 year history of Braemar excellence and reliability

Leading technology and innovation come as standard



WARRANTY

Quality that lasts – 5 year comprehensive manufacturer's warranty

A network of highly professional dealers and service agents throughout Australia



ENVIRONMENT

The ducted reverse cycle air conditioning range uses eco-friendly R410A refrigerant


Standard features

The DC inverter technology difference

All Braemar ducted inverter systems feature DC inverter technology.

An inverter is a power conversion circuit that electronically regulates the voltage, current and frequency of an air conditioner. This circuit controls the compressor, outdoor and indoor fans, maximising the air conditioner's efficiency.


Compared to conventional models, inverter air conditioners provide:




Quicker and finer temperature control and comfort




Significantly lower running costs



Elimination of temperature fluctuations



Wider operating temperatures (model specific)



Greatly reduced system noise inside and outside the home

DC inverter technology vs. conventional

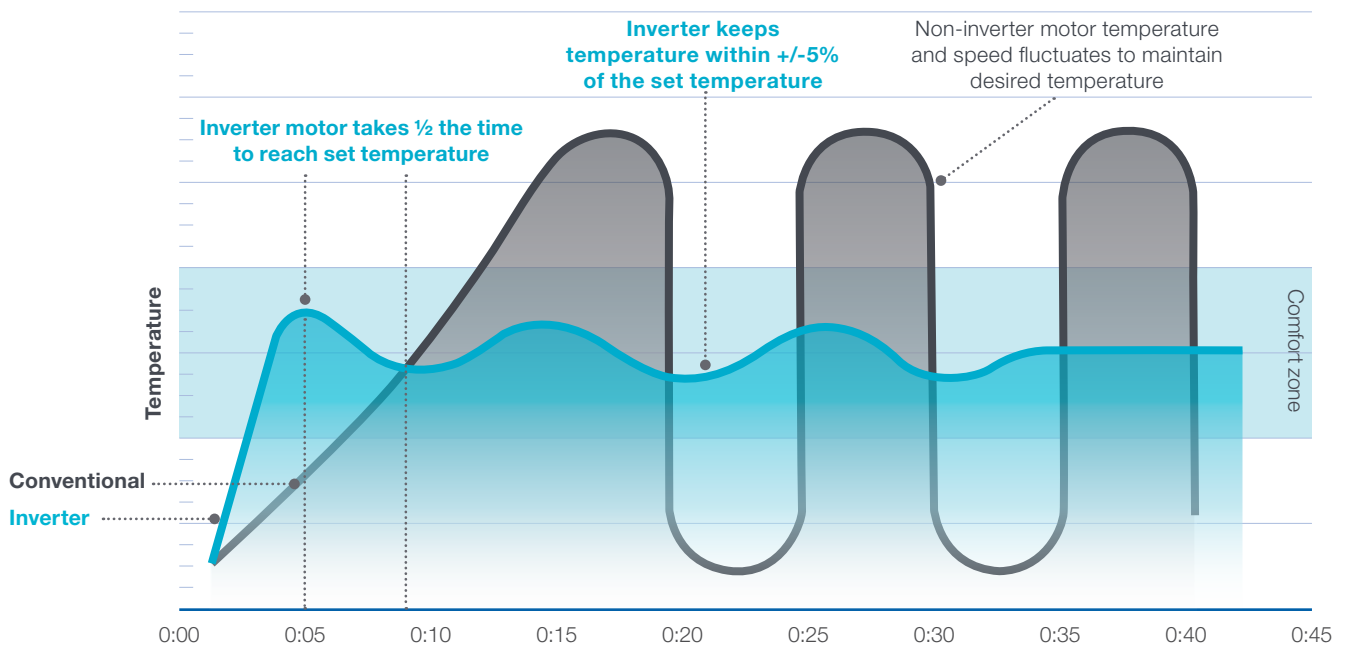


Table for illustration purposes only.



DRED as standard

With the introduction of smart power meters (PeakSmart in QLD), the electrical supply authority can limit the amount of power to the property at certain times during extreme weather conditions, when the power supply is at peak demand, using DRED (Demand Response Enabling Device).

In some states, the power supply authorities offer financial incentives to consumers who install DRED enabled air conditioning systems. **All of Braemar's latest inverter products now come with DRED as standard.**



Ducted reverse cycle

The ideal solution for whole of home or office heating and cooling

Consisting of an indoor and outdoor unit, the indoor unit is placed within the roof space and is connected to a series of vents within the house via ductwork. Warm or cool air is circulated to all rooms via this system and can be set up to operate in different zones, saving money on energy costs.

The inverter technology ensures uninterrupted comfort at all times.

Braemar offers single phase and three phase options.

Single phase ducted reverse cycle

Indoor units



POWER SAVING

High energy efficiency results in significant savings in running costs.



EFFICIENT AND QUIET

Inverter technology, optional motion sensor and installer settings tailoring airflow all make for best efficiency and the quietest operation.



HOME AUTOMATION SYSTEM ADAPTABLE

Modbus compatibility allows operation with a wide range of home automation systems. Remote on/off control available for applications that require connection to a Building Management System (BMS), or require a room card.



LOW PROFILE DESIGN

Visually appealing, discrete and low profile unit to deliver conditioned air via ducting and suitable ceiling or wall grilles.



EASY AND FLEXIBLE INSTALLATION


Compact, adaptable room positioning and built in drain pump allows for flexible installation choices. 2 core signal cable to outdoor unit allows for quick installation.



Available in 5 sizes.

Single phase ducted reverse cycle

Outdoor units



FLEXIBLE OUTDOOR PLACEMENT

Long pipe runs of up to 50m allows flexibility in placing an outdoor unit.



SLIM DESIGN

Allows more flexibility in placing an outdoor unit.



QUICK AND EASY INSTALLATION

Single drain connection point allows for quick and easy installation.



Three phase ducted reverse cycle

Indoor units



POWER SAVING

High energy efficiency results in significant savings in running costs.



EFFICIENT AND QUIET

Inverter technology and installer settings tailoring airflow all make for best efficiency and the quietest operation.



HOME AUTOMATION SYSTEM ADAPTABLE

Remote on/off control available for applications that require connection to a Building Management System (BMS), or require a room card.



LOW PROFILE DESIGN

Visually appealing, discrete and low profile design that can be concealed above ceilings to deliver conditioned air via ducting and suitable ceiling or wall grilles.




EASY AND FLEXIBLE INSTALLATION

Compact and adaptable room positioning allows for flexible installation choices. 3 core signal cable to outdoor unit allows for quick installation.

Available in 2 sizes.


Three phase ducted reverse cycle

Outdoor units



FLEXIBLE OUTDOOR PLACEMENT

Long pipe runs of up to 50m and top fan discharge allows flexibility in placing an outdoor unit.



QUICK AND EASY INSTALLATION
















Single drain connection point allows for quick and easy installation.



Smart controllers







Ducted single phase



-  **LCD backlit display**
For visibility at night.
-  **5 modes**
Auto, cool, dry, fan, heat.
-  **7 fan settings**
Auto, low, medium low, medium, medium high, high, super high.
-  **Sleep function**
Adjusts temperature up or down a few degrees during the night. Reduces energy usage while sleeping.
-  **Quiet function**
Reduces fan speed to ensure air conditioner runs more quietly.
-  **Memory function (if a power failure occurs)**
Automatically restarts and resumes the settings.
-  **Turbo function**
Ultra high fan speed to quickly cool the home.
-  **Energy-saving function**
Change the pre-set upper and lower temperatures. Perfect for apartments to reduce energy usage.
-  **Blow function (in cooling mode)**
Extends the time the fan continues to run after the cooling set point temperature is met.
-  **Defrosting function**
Auto function to ensure optimum heating even in the iciest environments.
-  **Filter clean remind**
Automatic reminder that filter needs cleaning.
-  **Timer**
Delay the on/off of the air conditioner to save money.
-  **Child lock**
Children are unable to change settings.
-  **Error code display**
Assists in fault identification and troubleshooting. Also displays when DRED is in operation.
-  **Read ambient outdoor temperature**
Understand how well the unit is functioning.

Ducted three phase



-  **LCD backlit display**
For visibility at night.
-  **5 modes**
Auto, cool, dry, fan, heat.
-  **4 fan settings**
Auto, low, medium, high.
-  **Quiet function**
Reduces fan speed to ensure air conditioner runs more quietly.
-  **Memory function (if a power failure occurs)**
Automatically restarts and resumes the settings.
-  **Filter clean remind**
Automatic reminder that filter needs cleaning.
-  **Timer**
Delay the on/off of the air conditioner to save money.
-  **Child lock**
Children are unable to change settings.

Other single phase controllers are available, please check with the dealer.

Single phase ducted reverse cycle

Specifications

Model No.	Indoor unit	SDHV07D1S	SDHV10D1S	SDHV12D1S	SDHV14D1S	SDHV16D1S
	Outdoor unit	SCHV07D1S	SCHV10D1S	SCHV12D1S	SCHV14D1S	SCHV16D1S
Capacity	Cooling (kW)	7.0 (2.40~9.50)	10.0 (3.20~11.00)	12.0 (4.00~13.50)	13.7 (6.00~14.50)	16.0 (6.40~17.00)
	Heating (kW)	8.0 (2.40~10.00)	12.0 (2.90~13.00)	13.8 (4.00~15.00)	16.0 (5.20~17.00)	18.0 (5.30~19.50)
AEER / ACOP	W / W (tested)	3.11 / 3.45	3.23 / 3.53	3.21 / 3.34	3.24 / 3.34	3.16 / 3.66
EER / COP	W / W (rated)	3.21 / 3.51	3.23 / 3.64	3.24 / 3.45	3.22 / 3.33	3.20 / 3.60
Power supply	Indoor and outdoor V / Ph / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Power input	Cooling (kW)	2.18 (0.85~2.50)	3.10 (0.70~4.50)	3.70 (0.65~4.70)	4.25 (1.40~5.60)	5.00 (1.20~6.90)
	Heating (kW)	2.28 (0.80~2.75)	3.30 (0.70~4.60)	4.00 (1.30~5.50)	4.80 (1.30~5.50)	5.00 (1.20~6.90)
Current input (max.)	Cooling/heating indoor (A)	1	1	1	2	2
	Cooling/heating outdoor (A)	16	19	21	28	31
Indoor unit	Rated airflow @ 50 Pa (L/s)	417	556	611	694	861
	Min/max airflow (L/s)	250-500	330-750	420-900	470-950	610 -1000
	Range (9 settings) Pa	0-200	0-200	0-200	0-200	0-200
	Rated speed (min/max)	S09 (S05 to S13)	S09 (S05 to S13)	S09 (S05 to S13)	S09 (S05 to S13)	S09 (S05 to S13)
	Duct flange S/A (mm)	820 x 160	850 x 190	850 x 190	850 x 190	990 x 190
	Duct flange R/A (mm)	980 x 230	950 x 315	950 x 315	950 x 315	1150 x 345
	Sound pressure level (dB(A))	40~47	42~50	43~52	46~54	47~55
	Dimensions (W x H x D), outline (mm)	1220 x 290 x 790	1340 x 350 x 750	1340 x 350 x 750	1340 x 350 x 750	1497 x 389 x 799
Net / Gross weight (kg)	47 / 55	56 / 68	59 / 70	59 / 71	79 / 103	
Outdoor unit	Sound pressure level (dB(A))	56	60	60	61	61
	Dimensions (W x H x D) (mm)	980 x 790 x 427	1107 x 1100 x 440	1107 x 1100 x 440	1085 x 1365 x 427	1085 x 1365 x 427
	Net / Gross weight (kg)	69 / 74	91 / 100	101 / 111	117 / 128	121 / 133
Refrigerant charge	R410A (kg)	2.2	3.5	3.9	4.0	5.5
Pipe	Liquid size (mm)	9.53 (3/8)	9.53 (3/8)	9.53 (3/8)	9.53 (3/8)	9.53 (3/8)
	Gas size (mm)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	19.05 (3/4)
	Pre-charge length (m)	7.0	7.0	7.0	9.5	9.5
	Additional charge (g/m)	60	60	60	60	60
	Max distance height / length (m)	15 / 50	15 / 50	30 / 50	30 / 50	30 / 50
Electrical	Indoor to outdoor (mm ²)	2 x 0.75 non shielded (H05RN-F)	2 x 0.75 non shielded (H05RN-F)	2 x 0.75 non shielded (H05RN-F)	2 x 0.75 non shielded (H05RN-F)	2 x 0.75 non shielded (H05RN-F)
	Power to indoor (mm ²)	3 x 1.0 (H05RN-F)	3 x 1.0 (H05RN-F)	3 x 1.0 (H05RN-F)	3 x 1.0 (H05RN-F)	3 x 1.0 (H05RN-F)
	Power to outdoor (mm ²)	3 x 2.5 (H07RN-F)	3 x 4.0 (H07RN-F)	3 x 4.0 (H07RN-F)	3 x 6.0 (H07RN-F)	3 x 6.0 (H07RN-F)
	Recommended fuse indoor (amp)	6	6	6	6	6
	Recommended fuse outdoor (amp)	20	25	25	40	40
Set temp. range	°C	16~30	16~30	16~30	16~30	16~30
Ambient temperature range	Cooling (°C)	-15~48	-15~48	-15~48	-15~48	-15~48
	Heating (°C)	-10~24	-10~24	-10~24	-10~24	-10~24

Three phase ducted reverse cycle

Specifications

Model No.	Indoor unit	SDHV22B1S	SDHV26B1S
	Outdoor unit	SCHV22B3S	SCHV26B3S
Capacity	Cooling (kW)	23.5 (8.86~26.60)	26.5 (10.00~30.00)
	Heating (kW)	25.5 (12.31~28.30)	26.5 (13.00~30.00)
AEER / ACOP	W / W (tested)	3.23 / 3.29	3.11 / 3.29
EER / COP	W / W (rated)	3.36 / 3.38	3.23 / 3.31
Power supply	Indoor (V / Ph / Hz)	220-240 / 1 / 50	220-240 / 1 / 50
	Outdoor (V / Ph / Hz)	380-415 / 1 / 50	380-415 / 1 / 50
Power input	Cooling (kW)	7.00 (2.05~8.57)	8.20 (2.40~9.80)
	Heating (kW)	7.55 (3.20~9.24)	8.00 (3.40~9.80)
Current input (max.)	Cooling/heating indoor (A)	4.5	4.5
	Cooling/heating outdoor (A)	16	16
Indoor unit	Rated airflow @ 50 Pa (L/s)	1389	1389
	Min/max airflow (L/s)	830-1400	830-1400
	Range (9 settings) Pa	0-200	0-200
	Rated speed (min/max)	5 Settings	5 Settings
	Duct flange S/A (mm)	800 x 200	800 x 200
	Duct flange R/A (mm)	1145 x 395	1145 x 395
	Sound pressure level (dB(A))	56	56
	Dimensions (W x H x D), outline (mm)	1470 x 510 x 795	1470 x 510 x 795
	Net / Gross weight (kg)	83 / 92	83 / 92
Outdoor unit	Sound pressure level (dB(A))	66	66
	Dimensions (W x H x D) (mm)	948 x 1585 x 968	948 x 1585 x 968
	Net / Gross weight (kg)	231 / 256	231 / 256
Refrigerant charge	R410A (kg)	10	10
Pipe	Liquid size (mm)	12.70 (1/2)	12.70 (1/2)
	Gas size (mm)	28.60 (1,1/8)	28.60 (1,1/8)
	Pre-charge length (m)	5	5
	Additional charge (g/m)	120	120
	Max distance height / length (m)	30 / 50	30 / 50
Electrical	Indoor to outdoor (mm ²)	3 x 0.75 Shielded (HO5RN-F)	3 x 0.75 Shielded (HO5RN-F)
	Power to indoor (mm ²)	3 x 2.5 (HO7RN-F)	3 x 2.5 (HO7RN-F)
	Power to outdoor (mm ²)	5 x 6.0 (HO7RN-F)	5 x 6.0 (HO7RN-F)
	Recommended fuse indoor (amp)	16	16
	Recommended fuse outdoor (amp)	40	40
Set temp. range	°C	17~30	17~30
Ambient temperature range	Cooling (°C)	15~48	15~48
	Heating (°C)	-15~24	-15~24



BREEZAIR

Ducted Evaporative Air Conditioning

BRAEMAR

Ducted Evaporative Air Conditioning | Ducted Gas Heating
Reverse Cycle Air Conditioning | Gas Wall Furnaces and Space Heaters

CLIMATE WIZARD

Indirect Evaporative Air Conditioning

CONVAIR

Portable Air Conditioning

COOLAIR

Ducted Evaporative Air Conditioning

COOLERADO

Indirect Evaporative Air Conditioning

AIRA

Direct and Indirect Evaporative Air Conditioning | Ducted Gas Heating
Commercial Gas Space Heating | Energy Recovery Systems

braemar.com.au
1300 360 815



With the generous support of our Australasian dealers we are proud to be the National Variety Bash partner supporting kids in need across Australia.

Seeley International Pty Ltd
ABN 23 054 687 035

112 O'Sullivan Beach Road, Lonsdale, SA 5160

Phone: (08) 8328 3850 Fax: (08) 8328 3950

Email: marketing@seeleyinternational.com

www.seeleyinternational.com

Information in this brochure was correct at the time of preparation. E & OE



Quality
ISO 9001

657kg
CO₂ saved
on this project

This brochure was printed by an environmentally friendly printer certified in accordance with ISO14001 Environmental Management Systems. As a certified carbon neutral printer, 657kg of CO₂ was saved during the production process.

Cat No M401 REV A (0717)